

# DCR-1000 Residential Drying Cabinet

[Click here  
for  
Video](#)

- Custom built for heavy jackets, leathers, and boots or delicate items you don't want to shrink or tumble dry. Simple controls with factory preset temperatures to ensure proper drying temperature for each unique clothing item. Dry sweaters, leather, wool jackets or anything that you don't want to subject to the stress of a tumble dryer.
- Folding shelves add great versatility.
- Can hold up to 8 hangers per shelf.
- Staber DCR-1000 is ideal for homes, motorcycle shops, salons, day spas, ski resorts, senior living facilities and the healthcare or hospitality industries.

## Features

- Available in Stainless Steel
- Glass door available
- 5 preset options including air only
- Two hanging bars on door
- Made in the USA
- Double wall construction for increased energy efficiency
- Reversible Door available (open right or left/optional)
- Shoe rack (optional)
- Door handle (optional)
- Door lock (optional)
- Caster wheels (mobile cabinet/optional)
- Air filtration (MERV10/optional)

## Benefits

- Make clothes last longer
- High capacity for larger loads
- Natural No-Tumble Drying



**DCR-1000**  
Shown with optional shoe rack



**DCRSS-1000**

**Ask us about our Residential Washer and Electric/Gas Tumble Dryer**

# DCR-1000

## Residential Drying Cabinet

[Click here for Video](#)

### Specifications

- Capacity: 8 long hanging garments, 2 flat dry items, and items placed on floor.
- Electric Connection: 120V 15 amp breaker, the cord is centered on back panel and is 12' long.
- Width: 23 1/2"
- Depth: 24 1/2"
- 46 1/2" with door open
- Height: 67 1/2"
- Net Weight: 150 lbs
- Shipping Weight: 245 lbs

**General:** The Residential drying cabinet, (DCR), is manufactured with quality materials designed for ease of use and long lasting durability. The overall design offers a variety of drying uses, all with a focus on the drying of non standard items that should not be dried using a tumble dry application. The DCR is designed for many years of useful service with easy access to major components for removal and installation of replacement parts.

**Electrical Configuration:** The DCR runs on 120 volt power using a single phase 15 amp breaker. The DCR is shipped with a standard 3 prong electrical plug that's ready to be plugged into a standard home outlet.


**Heating Element:** The DCR uses one, 1200 watt 120v heating element. The design allows for ease of maintenance if removal and replacement of the heating element is required.

**Blower Motor:** The DCR blower motor is bolted to the top frame under the upper cover. It uses an axial fan that blows air across the heating elements.

**Ventilation:** Ventilation is at the users discretion but the DCR has a 4" opening in the top, centered and 5" inboard of the left sidewall to accept 4" ducting if desired by the user. Evacuation of the moist air can be performed in two ways:

- Waste air from the dryer cabinet is led to an evacuation duct or an outlet in the wall using a vent hose, which is recommended
- Ventilation out into the room where the dryer cabinet is positioned. If there is adequate space above the drying cabinet then venting is not required.

**Induction air:** There is a 7 1/2" x 2" opening centered, 1 3/4"-3 3/4" from right sidewall. It is recommended to allow 4" above the top height for adequate air induction and at least 2" around each side.

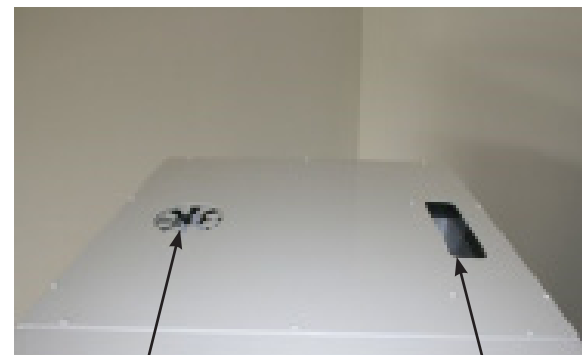

Waste air

Induction air

**Ask us about our Residential Washer and Electric/Gas Tumble Dryer**

# DCR-1000

## Residential Drying Cabinet

### Electrical Controls

The DCR has a touch sensor electronic control panel mounted on the front top panel above the door. The control panel senses, displays and controls temperature and run time with five preset temperatures.

### Temperature Settings

A simple touch of the TEMP pad on the control panel allows selection of a total of five preset drying temperature settings, with associated LED light indicators. The five different drying temperatures are: FAN (No Heat), 105F (Low), 120F (Medium), 130F (Normal) & 150F (High).

### Time Settings

A simple touch of the HOUR and MINUTE time setting pads on the control panel allows users to select the run time in 15-minute increments with a maximum run time setting of 10 hours.

### One Year Warranty

From 1 year from the date of purchase, when this drying cabinet is operated and maintained according to instructions attached to or furnished with the product, Staber Industries Inc. replacement parts and repair labor to correct defects in materials or workmanship.



#### SERVICEABILITY

If required, ease of maintenance is one of the benefits of the Staber Residential Drying Cabinet's design. The cabinet is designed to be end user repairable. There is total front/top access to all replaceable parts and few overall moving parts. A Factory Customer Service representative is available during normal business hours (Monday through Friday, 8AM - 3PM EST) and can be reached at 800-828-6200.

**Ask us about our Residential Washer and Electric/Gas Tumble Dryer**